

Product Summary

Drain inlet protection assists in the prevention of coarse sediment from entering the underground storm pipe system prior to the permanent stabilization of disturbed areas as in construction sites, or on the street after winter sanding. This is accomplished by using a sediment filter and trap around the storm drain. The device slows the runoff velocity, filters the runoff, and aids in sedimentation prior to the runoff entering the drain inlet.

Contact Details


bmpsupplies.com
sales@bmpsupplies.com
1.855.422.0066

CURB INLET FILTER PART #CIF6048

SPECIFICATION SHEET

Description

This work shall consist of furnishing, installing, maintaining, and removing Curb Inlet Filters as directed by authorized site personnel or as shown on the contract drawings. The BMP Supplies Inc Curb Inlet Filter - Part #CIF6048 - is a bright orange and yellow flexible fabric tube filled with clean, kiln dried, weed and bark free wood shavings. The tube has attached webbing and buckles that serve to attach the sock to the curb grate.

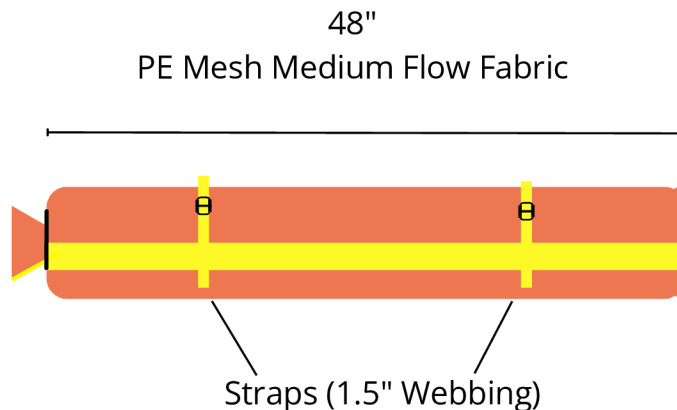

Installation

- Lay the sock in front of the curb inlet opening.
- Wrap the webbing around the sock and around the bar in the curb grate.
- Loop the webbing through the buckle and tighten.
- Repeat for the second strap.

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.