

TYPE 2 DOT TURBIDITY CURTAIN

SPECIFICATION SHEET

Product Summary

The BMP Supplies Type 2 DOT Turbidity Curtain is manufactured with top load cables, stress plates for reinforcing the corners, and aluminum stress plate w/quick connector used to connect one section to another. Both the floats and skirt are manufactured using 18oz PVC Fabric.

Contact Details

bmpsupplies.com
sales@bmpsupplies.com
1.855.422.0066

Curtain Warehouse


321 - 18st S.E.
Calgary, AB, T2E 6J5
Canada

Float Fabric	18oz PVC
Body Fabric	18oz PVC
End Treatment	#2 Grommet with Reinforced Rope
Section Size	50' Length x 2.5-15' Depth (custom sizes available)
Floatation	8" x 8" x 80" EPS Foam
Net Buoyancy	26+ lbs per foot
Ballast	5/16" Steel Chain
Ballast Chain Connection	Aluminum Stress Plate w/Quick Connector
Connection Between Sections	Weather Resistant Zip Ties
Top Load Carrying Component	5/16" (7.93mm) Steel Cable

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.

TYPE 2 DOT TURBIDITY CURTAIN

PRODUCT DIAGRAM

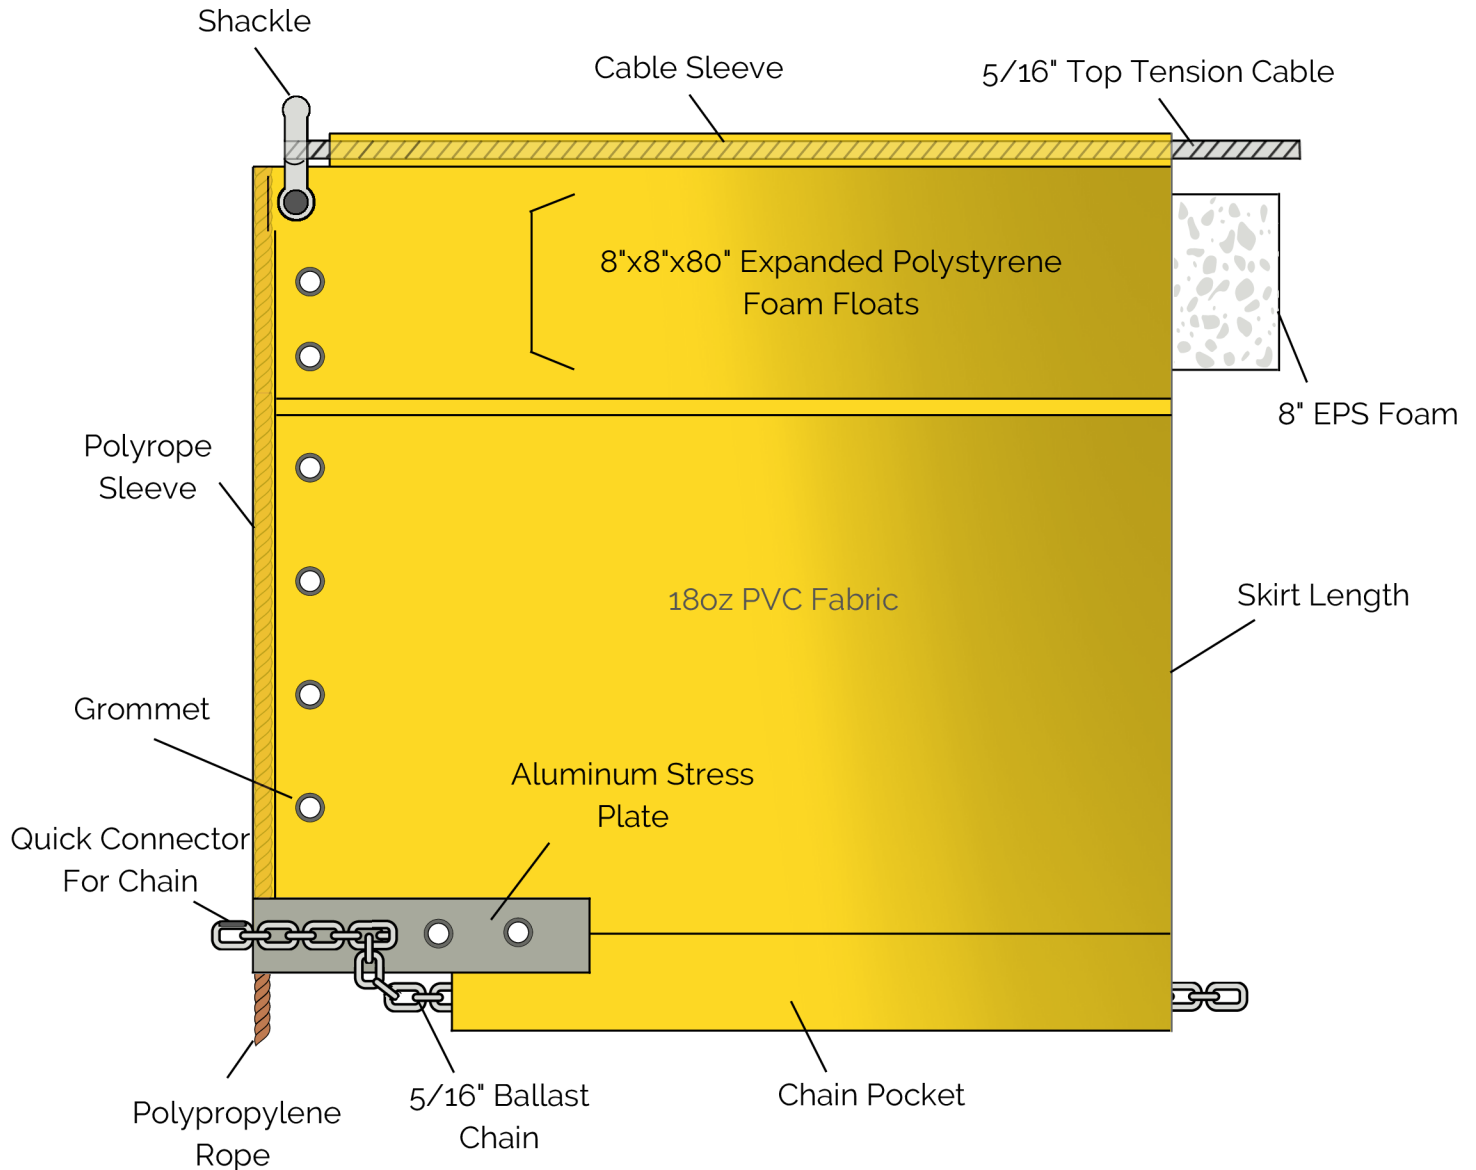

The information contained herein is furnished without charge or obligation and the recipient assumes all responsibility for its use. Because conditions of use and handling may vary and are beyond our control, we make no representation about, and are not responsible or liable for the accuracy and reliability of said information or the performance of any product. Any specification, property or application listed herein are provided as information only and in no way modify, amend, enlarge or create any warranty. Nothing contained herein is to be construed as permission or as a recommendation to infringe any patent.